


uPVC Conduit pipes with integral solvent weld socket

as per
BS EN
61386-24



Material: uPVC
Colour: Yellow
Dimension: mm
Trademark: PPP

Rigid Electrical Conduit

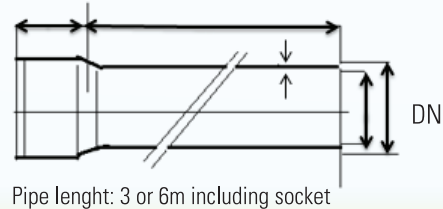

Field of application:

Rigid conduit piping for cable management
(buried underground)

GENERAL TECHNICAL CHARACTERISTICS

Geometrical Characteristics

- Dimensions
- Nominal outside diameters
- Wall Thickness (plain conduit)

Standard Requirements

Clause 8 Table 101
Clause 8 Table 101 (size only)
Annex B B.1 BS EN 61386-1

Mechanical Characteristics

- Resistance to Compression
- Resistance to Impact

Clause 10.2 - **Type:** 250N, 450N, 750N
Clause 10.3 - **Type:** Light (code L), Normal (code N)

Diameter mm	Wall thickness			
	Duty: 450N	di	Duty: 750N	di
40	1.8	36.4	N/A	N/A
50	2.0	46	2.4	45.2
63	2.0	59	3.0	57
75	2.8	69.4	3.2	68.6
*80	2.5	75	3.0	74
110	3.2	103.6	4.2	101.6
160	4.7	150.6	5.2	149.6

* Special Customer requirement

Manufactured by PPP Piping Systems Ltd - Certified MS ISO 9001:2008 | MSB Test Report available on request (conditions apply)

Email: info@str.mu | website: www.str.mu

STR Marketing Ltée | Old Moka Road | Bell Village | P.O. Box 98 | Port Louis - Mauritius | Tel: (230) 212 9972 | Fax: (230) 212 9998