


uPVC Conduit pipes with integral Solvent Weld Sockets

as per
BS EN
61386-21



Material: uPVC
Colour: White
Dimension: mm
Trademark: PPP

Rigid Electrical Conduit

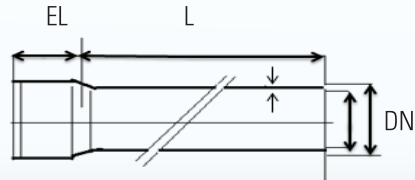

Pipe length : 3 or 6m including socket

Field of application:

- Rigid conduit systems for cable management
- Classification coding: Medium duty: 3321 / Heavy duty: 4321

GENERAL TECHNICAL CHARACTERISTICS

General Characteristics

- Dimensions
- Nominal outside diameters
- Wall Thickness (plain conduit)

Mechanical Characteristics

- Resistance to Compression
- Resistance to Impact

According to temperature

- Lower temperature
- Upper temperature

Standard Requirements

As per Clause 8
Clause 8 Table 101 size only (BS EN 61386-21)
Annex B B.1 BS EN 61386-1

Clause 10.2 - **Duty:** Medium (750N) & Heavy (1250N)
Clause 10.3 IEC 61386-1 - **Duty:** Medium & Heavy

Clause 6.2.1 Table 1 BS EN 61386-1 -5°C
Clause 6.2.2 Table 2 BS EN 61386-1 +60°C

Diameter mm	Wall thickness			
	Duty: 750N	di	Duty: 1250N	di
16	N/A	N/A	1.5	13
20	1.2	17.6	1.5	17
25	1.2	22.6	1.8	21.4
32	1.5	29	2	28

*Manufactured by PPP Piping Systems Ltd - Certified MS ISO 9001:2008 | MSB Test Report available on request (conditions apply)